

### HORSE STILE

#### THE ASSEMBLY OVERVIEW

We recommend that the Horse Stile is installed in line with BS 5709..


The key dimensions specified are

Width between panels - A minimum of 1.525m

Height of timbers above ground level - a maximum of 25cm

Thickness of timbers - 1.5m timbers recommended , this would give you 1200mm centre to centre - timbers to a less specification , spacers may have to be used

**NOTE : we do not supply the timbers**

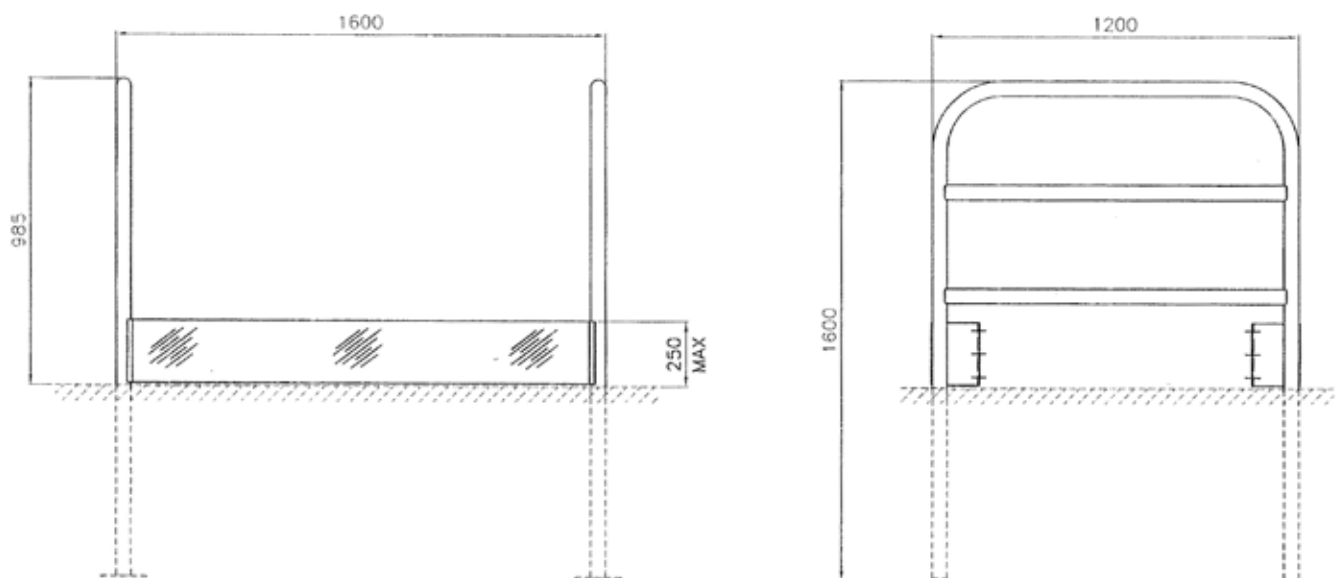

**NOTE : this design is not suitable over hard surfaces e.g. concrete or tarmac**

Please check that you have all the required components on site to complete the installation.

Side panels

X 2



If you need any further advice/guidance regarding the installations of any of these products please contact the office on the number below.